



Dishwashing

Conveyor dishwashers

DISHWASHER, FI-160 I

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	1.430,00	1.530,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	211,00	305,00
Volumen	m3	1,76	2,79

ELECTRICITY

<u>Electric power</u>		KW	37,32
230V -1+N			
230V - III		3x25+T - 100 A	
400V - III+N		4x16+T - 63 A	

WATER

Water consumption (lit/h)			450,00
Pressure (Kg/cm2)			2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used


DISHWASHER, FI-160 I

Made of stainless steel.
 Entry on the left side.
 Wash capacity: 90 baskets/h.
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Wash tank for 45 litres.
 Tray-filters removable for cleaning.
 Two wash-pumps, 600 W each.
 Tank heated by means of shielded elements, 9 kW. Thermostatically adjusted (wash temperature: 60 °C).
 Built-in rinse water boiler (27 kW).
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 450 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 120 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105 and 10 cutlery containers.
 Power: 37.32 kW.
 Dimensions: 1430 x 780 x 1580 mm.

Certificate EQNET- CE

SGS-2199-0192-1

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	230	120	1.440		Prever Interruptor diferencial
DRAIN	810	440	130	38	
SOFT HOT WATER	430	660	240	3/4"	Prever llave de corte en la toma





Dishwashing

Conveyor dishwashers

DISHWASHER, FI-160 D

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	1.430,00	1.530,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	211,00	305,00
Volumen	m3	1,76	2,79

ELECTRICITY

<u>Electric power</u>		KW	37,32
230V - I+N			
230V - III		3x25+T - 100 A	
400V - III+N		4x16+T - 63 A	

WATER

Water consumption (lit/h)			450,00
Pressure (Kg/cm2)			2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used


DISHWASHER, FI-160 D

Made of stainless steel.
 Entry on the right side.
 Wash capacity: 90 baskets/h.
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Wash tank for 45 litres.
 Tray-filters removable for cleaning.
 Two wash-pumps, 600 W each.
 Tank heated by means of shielded elements, 9 kW. Thermostatically adjusted (wash temperature: 60 °C).
 Built-in rinse water boiler (27 kW).
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 450 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 120 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105 and 10 cutlery containers.
 Power: 37.32 kW.
 Dimensions: 1430 x 780 x 1580 mm.

Certificate EQNET- CE

SGS-2199-0192-1

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	70	160	320		Prever Interruptor diferencial
DRAIN	810	440	130	38	
SOFT HOT WATER	380	630	240	3/4"	Prever llave de corte en la toma





Dishwashing

Conveyor dishwashers

DISHWASHER, FI-200 I

DIMENSIONS

		Article	Packed
Length	mm	1.430,00	1.530,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	211,00	305,00
Volumen	m3	1,76	2,79

ELECTRICITY

Electric power	KW	
230V -1+N		
230V - III		3x25+T - 100 A
400V - III+N		4x16+T - 63 A

WATER

Water consumption (lit/h)	450,00
Pressure (Kg/cm2)	2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00

Certificate EQNET- CE

SGS-2199-0192-1

DISHWASHER, FI-200 I

Made of stainless steel.

Entry on the left side.

Two conveyor speeds:

1st. Speed: 85 baskets/h.

2nd. Speed: 110 baskets/h.

Splash-guard module at entry.

Dividing curtains highly resistant to chemical agents and heat.

Wash tank for 45 litres.

Tray-filters removable for cleaning.

Two wash-pumps, 600 W each.

Tank heated by means of shielded elements, 9 kW.

Thermostatically adjusted (wash temperature: 60 °C).

Built-in rinse water boiler (27 kW).

Safety thermostat.

Analogic thermometers for wash and rinse water temperature.

Water consumption: 450 l/h.

Magnetic switches for wash, rinse and door opening.

Energy economiser system.


Motor-reducer: 180 W.

Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105 and 10 cutlery containers.

Power: 37.38 kW.

Dimensions: 1430 x 780 x 1580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	70	160	320		Prever Interruptor diferencial
DRAIN	810	440	130	38	
SOFT HOT WATER	380	630	240	3/4"	Prever llave de corte en la toma





Dishwashing

Conveyor dishwashers

DISHWASHER, FI-200 D

DIMENSIONS

		Article	Packed
Length	mm	1.430,00	1.530,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	211,00	305,00
Volumen	m3	1,76	2,79

ELECTRICITY

Electric power	KW	
230V -1+N		37,38
230V - III		3x25+T - 100 A
400V - III+N		4x16+T - 63 A

WATER

Water consumption (lit/h)	450,00
Pressure (Kg/cm2)	2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE

SGS-2199-0192-1

DISHWASHER, FI-200 D

Made of stainless steel.
 Entry on the right side.
 Two conveyor speeds:
 1st. Speed: 85 baskets/h.
 2nd. Speed: 110 baskets/h.
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Wash tank for 45 litres.
 Tray-filters removable for cleaning.
 Two wash-pumps, 600 W each.
 Tank heated by means of shielded elements, 9 kW.
 Thermostatically adjusted (wash temperature: 60 °C).
 Built-in rinse water boiler (27 kW).
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 450 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 180 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105 and 10 cutlery containers.
 Power: 37.38 kW.
 Dimensions: 1430 x 780 x 1580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	70	160	320		Prever Interruptor diferencial
SOFT HOT WATER	380	630	240	3/4"	Prever llave de corte en la toma
DRAIN	810	440	130	38	





Dishwashing

Conveyor dishwashers

DISHWASHER, FI-200 H I

DIMENSIONS

		Article	Packed
Length	mm	1.430,00	1.530,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	211,00	305,00
Volumen	m3	1,76	2,79

ELECTRICITY

Electric power	KW	
230V - I+N		
230V - III		3x25+T - 100 A
400V - III+N		4x16+T - 63 A

WATER

Water consumption (lit/h)	450,00
Pressure (Kg/cm2)	2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE

SGS-2199-0192-1

DISHWASHER, FI-200 H I

Made of stainless steel.
 High speed motor-reducer.
 Entry on the left side.
 Two conveyor speeds:
 1st. Speed: 100 baskets/h.
 2nd. Speed: 150 baskets/h.
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Wash tank for 45 litres.
 Tray-filters removable for cleaning.
 Two wash-pumps, 600 W each.
 Tank heated by means of shielded elements, 9 kW. Thermostatically adjusted (wash temperature: 60 °C).
 Built-in rinse water boiler high power (34.5 kW).
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 450 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 180 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105 and 10 cutlery containers.
 Power: 44.90 Kw.
 Dimensions: 1430 x 780 x 1580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	70	160	320		Prever Interruptor diferencial
SOFT HOT WATER	380	630	240	3/4"	Prever llave de corte en la toma
DRAIN	810	440	130	38	





Dishwashing

Conveyor dishwashers

DISHWASHER, FI-200 H D

DIMENSIONS

		Article	Packed
Length	mm	1.430,00	1.530,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	211,00	305,00
Volumen	m3	1,76	2,79

ELECTRICITY

Electric power	KW	
230V -1+N		44,90
230V - III		3x25+T - 100 A
400V - III+N		4x16+T - 63 A

WATER

Water consumption (lit/h)	450,00
Pressure (Kg/cm2)	2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE

SGS-2199-0192-1

DISHWASHER, FI-200 H D

Made of stainless steel.
 High speed motor-reducer.
 Entry on the right side.
 Two conveyor speeds:
 1st. Speed: 100 baskets/h.
 2nd. Speed: 150 baskets/h.
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Wash tank for 45 litres.
 Tray-filters removable for cleaning.
 Two wash-pumps, 600 W each.
 Tank heated by means of shielded elements, 9 kW. Thermostatically adjusted (wash temperature: 60 °C).
 Built-in rinse water boiler high power (34.5 kW).
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 450 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 180 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105 and 10 cutlery containers.
 Power: 44.90 Kw.
 Dimensions: 1430 x 780 x 1580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	70	160	320		Prever Interruptor diferencial
DRAIN	810	440	130	38	
SOFT HOT WATER	380	630	240	3/4"	Prever llave de corte en la toma





Dishwashing

Conveyor dishwashers

DISHWASHER, ECO-160 I

DIMENSIONS

		Article	Packed
Length	mm	1.430,00	1.530,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	211,00	305,00
Volumen	m3	1,76	2,79

ELECTRICITY

Electric power	KW	
230V - I+N		10,70
230V - III		3x4+T - 32 A
400V - III+N		4x2,5 - 20 A

WATER

Water consumption (lit/h)	400,00
Pressure (Kg/cm2)	2 - 4

GAS

Power	KW	46,50
	Kcal/h	39.990,00
LPG	Consumption (kg/h)	3,30
	Pressure (g/cm2)	37,00
Natural Gas	Consumption (m3/h)	4,20
	Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used


DISHWASHER, ECO-160 I

Made of stainless steel.
 Entry on the left side.
 Wash capacity: 90 baskets/h.
 Equipped with two GA-20 hot water generators (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Wash tank for 45 litres.
 Tray-filters removable for cleaning.
 Two wash-pumps, 600 W each.
 Tank heated by means of shielded elements, 9 kW. Thermostatically adjusted (wash temperature: 60 °C).
 Pump for rinse water.
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 400 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 120 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105 and 10 cutlery containers.
 Electric power: 10.7 kW.
 Gas power: 40000 kcal/h (46.5 kW)
 Dimensions: 1430 x 780 x 1580 mm.

Certificate EQNET- CE

99AQ244

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	70	160	320		Prever Interruptor diferencial
DRAIN	810	440	130	38	





Dishwashing

Conveyor dishwashers

DISHWASHER, ECO-160 D

DIMENSIONS

		Article	Packed
Length	mm	1.430,00	1.530,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	211,00	305,00
Volumen	m3	1,76	2,79

ELECTRICITY

Electric power	KW	
230V -1+N		10,70
230V - III		3x4+T - 32 A
400V - III+N		4x2,5 - 20 A

WATER

Water consumption (lit/h)		400,00
Pressure (Kg/cm2)		2 - 4

GAS

Power	KW	46,50
	Kcal/h	39.990,00
LPG	Consumption (kg/h)	3,30
	Pressure (g/cm2)	37,00
Natural Gas	Consumption (m3/h)	4,20
	Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used


DISHWASHER, ECO-160 D

Made of stainless steel.
 Entry on the right side.
 Wash capacity: 90 baskets/h.
 Equipped with two GA-20 hot water generators (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Wash tank for 45 litres.
 Tray-filters removable for cleaning.
 Two wash-pumps, 600 W each.
 Tank heated by means of shielded elements, 9 kW. Thermostatically adjusted (wash temperature: 60 °C).
 Pump for rinse water.
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 400 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 120 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105 and 10 cutlery containers.
 Electric power: 10.7 kW.
 Gas power: 40000 kcal/h (46.5 kW)
 Dimensions: 1430 x 780 x 1580 mm.

Certificate EQNET- CE

99AQ244

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	70	160	320		Prever Interruptor diferencial
DRAIN	810	440	130	38	





Dishwashing

Conveyor dishwashers

DISHWASHER, ECO-200 I

DIMENSIONS

		Article	Packed
Length	mm	1.430,00	1.530,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	211,00	305,00
Volumen	m3	1,76	2,79

ELECTRICITY

Electric power	KW	
230V - I+N		10,70
230V - III		3x4+T - 32 A
400V - III+N		4x2,5 - 20 A

WATER

Water consumption (lit/h)		400,00
Pressure (Kg/cm2)		2 - 4

GAS

Power	KW	46,50
	Kcal/h	39.990,00
LPG	Consumption (kg/h)	3,30
	Pressure (g/cm2)	37,00
Natural Gas	Consumption (m3/h)	4,20
	Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE

99AQ244

DISHWASHER, ECO-200 I

Made of stainless steel.
 Entry on the left side.
 Two conveyor speeds:
 1st. Speed: 85 baskets/h.
 2nd. Speed: 110 baskets/h.
 Equipped with one GA-40 hot water generator (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Wash tank for 50 litres.
 Tray-filters removable for cleaning.
 Two wash-pumps, 600 W each.
 Tank heated by means of shielded elements, 9 Kw. Thermostatically adjusted (wash temperature: 60 °c).
 Pump for rinse water.
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 400 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 180 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105 and 10 cutlery containers.
 Electric power: 10.7 Kw.
 Gas power: 40000 kcal/h (46.5 Kw)
 Dimensions: 1430 x 780 x 1580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	70	160	320		Prever Interruptor diferencial
DRAIN	810	440	130	38	





Dishwashing

Conveyor dishwashers

DISHWASHER, ECO-200 D

DIMENSIONS

		Article	Packed
Length	mm	1.430,00	1.530,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	211,00	305,00
Volumen	m3	1,76	2,79

ELECTRICITY

Electric power	KW	
230V - I+N		10,70
230V - III		3x4+T - 32 A
400V - III+N		4x2,5 - 20 A

WATER

Water consumption (lit/h)		400,00
Pressure (Kg/cm2)		2 - 4

GAS

Power	KW	46,50
	Kcal/h	39.990,00
LPG	Consumption (kg/h)	3,30
	Pressure (g/cm2)	37,00
Natural Gas	Consumption (m3/h)	4,20
	Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE

99AQ244

DISHWASHER, ECO-200 D

Made of stainless steel.
 Entry on the right side.
 Two conveyor speeds:
 1st. Speed: 85 baskets/h.
 2nd. Speed: 110 baskets/h.
 Equipped with one GA-40 hot water generator (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Wash tank for 50 litres.
 Tray-filters removable for cleaning.
 Two wash-pumps, 600 W each.
 Tank heated by means of shielded elements, 9 Kw. Thermostatically adjusted (wash temperature: 60 °c).
 Pump for rinse water.
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 400 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 180 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105 and 10 cutlery containers.
 Electric power: 10.7 Kw.
 Gas power: 40000 kcal/h (46.5 Kw)
 Dimensions: 1430 x 780 x 1580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	70	160	320		Prever Interruptor diferencial
DRAIN	810	440	130	38	





Dishwashing

Conveyor dishwashers

DISHWASHER, ECO-200 HI

DIMENSIONS

		Article	Packed
Length	mm	1.430,00	1.530,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	211,00	305,00
Volumen	m3	1,76	2,79

ELECTRICITY

Electric power	KW	
230V -1+N		10,70
230V - III		3x4+T - 32 A
400V - III+N		4x2,5 - 20 A

WATER

Water consumption (lit/h)		400,00
Pressure (Kg/cm2)		2 - 4

GAS

Power	KW	46,50
	Kcal/h	39.990,00
LPG	Consumption (kg/h)	3,30
	Pressure (g/cm2)	37,00
Natural Gas	Consumption (m3/h)	4,20
	Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE

99AQ244

DISHWASHER, ECO-200 H I

Made of stainless steel.
 High speed model.
 Entry on the left side.
 Two conveyor speeds:
 1st. Speed: 100 baskets/h.
 2nd. Speed: 150 baskets/h.
 Equipped with one GA-40 hot water generator (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Wash tank for 50 litres.
 Tray-filters removable for cleaning.
 Two wash-pumps, 600 W each.
 Tank heated by means of shielded elements, 9 kW. Thermostatically adjusted (wash temperature: 60 °C).
 Pump for rinse water.
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 400 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 180 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105 and 10 cutlery containers.
 Electric power: 10.7 kW.
 Gas power: 40000 kcal/h (46.5 kW)
 Dimensions: 1430 x 780 x 1580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	70	160	320		Prever Interruptor diferencial
DRAIN	810	440	130	38	





Dishwashing

Conveyor dishwashers

DISHWASHER, ECO-200 HD

DIMENSIONS

		Article	Packed
Length	mm	1.430,00	1.530,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	211,00	305,00
Volumen	m3	1,76	2,79

ELECTRICITY

Electric power	KW	
230V -1+N		10,70
230V - III		3x4+T - 32 A
400V - III+N		4x2,5 - 20 A

WATER

Water consumption (lit/h)		400,00
Pressure (Kg/cm2)		2 - 4

GAS

Power	KW	46,50
	Kcal/h	39.990,00
LPG	Consumption (kg/h)	3,30
	Pressure (g/cm2)	37,00
Natural Gas	Consumption (m3/h)	4,20
	Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE

99AQ244

DISHWASHER, ECO-200 H D

Made of stainless steel.
 High speed model.
 Entry on the right side.
 Two conveyor speeds:
 1st. Speed: 100 baskets/h.
 2nd. Speed: 150 baskets/h.
 Equipped with one GA-40 hot water generator (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Wash tank for 50 litres.
 Tray-filters removable for cleaning.
 Two wash-pumps, 600 W each.
 Tank heated by means of shielded elements, 9 kW. Thermostatically adjusted (wash temperature: 60 °C).
 Pump for rinse water.
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 400 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 180 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105 and 10 cutlery containers.
 Electric power: 10.7 kW.
 Gas power: 40000 kcal/h (46.5 kW)
 Dimensions: 1430 x 780 x 1580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	70	160	320		Prever Interruptor diferencial
DRAIN	810	440	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, FI-280 D

DIMENSIONS

		Article	Packed
Length	mm	1.750,00	1.850,00
Depth	mm	780,00	955,00
Height	mm	1.580,00	1.890,00
Weigth	Kg	259,00	382,00
Volumen	m3	2,16	3,34

ELECTRICITY

Electric power	KW	
230V -1+N		
230V - III		3x50+T - 160 A
400V - III+N		4x25+T - 100 A

WATER

Water consumption (lit/h)	360,00
Pressure (Kg/cm2)	2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 65,00

CONVEYOR DISHWASHER, FI-280 D

Made of stainless steel.

Entry on the right side.

Two conveyor speeds:

-1st. Speed: 103 baskets/h.

-2nd. Speed: 155 baskets/h.

Splash-guard module at entry.

Wash module and double rinse module.

Dividing curtains highly resistant to chemical agents and heat.

Wash tank 90 litres. Tray-filters removable for cleaning.

Wash pump 2.2 kW. Tank heated by means of shielded elements, 12 kW.

Thermostatically adjusted (wash temperature: 60 °C).

Pre-rinse module. Tank heated by means of shielded elements, 5 kW.

Built-in rinse water boiler (27 kW).

Safety thermostat.

Analogic thermometers for wash and rinse water temperature.

Water consumption: 360 l/h.

Magnetic switches for wash, rinse and door opening.

Energy economiser system.


Motor-reducer: 250 W.

Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.

Power: 46.2 kW.

Dimensions: 1750 x 780 x 1580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	350	50	1.440		Prever Interruptor diferencial
SOFT HOT WATER	330	630	240	3/4"	Prever llave de corte en la toma
DRAIN	850	425	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, FI-280 I

DIMENSIONS

		Article	Packed
Length	mm	1.750,00	1.850,00
Depth	mm	780,00	955,00
Height	mm	1.580,00	1.890,00
Weigth	Kg	259,00	382,00
Volumen	m3	2,16	3,34

ELECTRICITY

Electric power	KW	
230V -1+N		
230V - III		3x50+T - 160 A
400V - III+N		4x25+T - 100 A

WATER

Water consumption (lit/h)	360,00
Pressure (Kg/cm2)	2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00

CONVEYOR DISHWASHER, FI-280 I

Made of stainless steel.

Entry on the left side.

Two conveyor speeds:

-1st. Speed: 103 baskets/h.

-2nd. Speed: 155 baskets/h.

Splash-guard module at entry.

Wash module and double rinse module.

Dividing curtains highly resistant to chemical agents and heat.

Wash tank 90 litres. Tray-filters removable for cleaning.

Wash pump 2.2 kW. Tank heated by means of shielded elements, 12 kW.

Thermostatically adjusted (wash temperature: 60 °C).

Pre-rinse module. Tank heated by means of shielded elements, 5 kW.

Built-in rinse water boiler (27 kW).

Safety thermostat.

Analogic thermometers for wash and rinse water temperature.

Water consumption: 360 l/h.

Magnetic switches for wash, rinse and door opening.

Energy economiser system.


Motor-reducer: 250 W.

Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.

Power: 46.2 kW.

Dimensions: 1750 x 780 x 1580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	700	50	1.440		Prever Interruptor diferencial
SOFT HOT WATER	680	630	240	3/4"	Prever llave de corte en la toma
DRAIN	1.200	425	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, FI-370 I

DIMENSIONS

		Article	Packed
Length	mm	2.350,00	2.440,00
Depth	mm	780,00	955,00
Height	mm	1.580,00	1.890,00
Weigth	Kg	381,00	556,00
Volumen	m3	2,90	4,40

ELECTRICITY

Electric power	KW	
230V -1+N		47,40
230V - III		3x50+T - 160 A
400V - III+N		4x25+T - 100 A

WATER

Water consumption (lit/h)	360,00
Pressure (Kg/cm2)	2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used


LEVEL SOUND

(dB) 72,00

CONVEYOR DISHWASHER, FI-370 I

Made of stainless steel.
 Entry on the left side.
 Two conveyor speeds:
 1st. Speed: 137 baskets/h.
 2nd. Speed: 205 baskets/h.
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Prewashing module:
 -Tank 55 litres
 -2 pumps x 0.6 kW.
 -No heating.
 Washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 12 kW.
 Double rinse module:
 -Pre-rinse module
 -Heating power: 5 kW.
 Rinse water boiler (27 kW). Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Tray-filters removable for cleaning.
 Thermostatically adjusted: wash 60 °C, and rinse 90 °C.
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 360 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 250 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.
 Electrical power: 47.4 kW.
 Dimensions: 2.350 x 780 x 1.580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	700	50	1.440		Prever Interruptor diferencial
SOFT HOT WATER	680	630	240	3/4"	Prever llave de corte en la toma
DRAIN	1.925	465	130	38	
DRAIN	1.200	425	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, FI-370 D

DIMENSIONS

		Article	Packed
Length	mm	2.350,00	2.440,00
Depth	mm	780,00	955,00
Height	mm	1.580,00	1.890,00
Weigth	Kg	381,00	556,00
Volumen	m3	2,90	4,40

ELECTRICITY

Electric power	KW	
230V -1+N		47,40
230V - III		3x50+T - 160 A
400V - III+N		4x25+T - 100 A

WATER

Water consumption (lit/h)	360,00
Pressure (Kg/cm2)	2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used


LEVEL SOUND

(dB) 65,00

CONVEYOR DISHWASHER, FI-370 D

Made of stainless steel.
 Entry on the right side.
 Two conveyor speeds:
 1st. Speed: 137 baskets/h.
 2nd. Speed: 205 baskets/h.
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Prewashing module:
 -Tank 55 litres
 -2 pumps x 0.6 kW.
 -No heating.
 Washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 12 kW.
 Double rinse module:
 -Pre-rinse module
 -Heating power: 5 kW.
 Rinse water boiler (27 kW). Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Tray-filters removable for cleaning.
 Thermostatically adjusted: wash 60 °C, and rinse 90 °C.
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 360 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 250 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.
 Electrical power: 47.4 kW.
 Dimensions: 2.350 x 780 x 1.580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	950	50	1.440		Prever Interruptor diferencial
SOFT HOT WATER	930	630	240	3/4"	Prever llave de corte en la toma
DRAIN	1.450	425	130	38	
DRAIN	675	465	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, FI-460 D

DIMENSIONS

		Article	Packed
Length	mm	2.650,00	2.750,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	434,00	628,00
Volumen	m3	3,27	5,02

ELECTRICITY

Electric power	KW	
230V -1+N		55,90
230V - III		3x70+T - 180 A
400V - III+N		4x35+T - 125 A

WATER

Water consumption (lit/h)	450,00
Pressure (Kg/cm2)	2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used


LEVEL SOUND

(dB) 72,00

CONVEYOR DISHWASHER, FI-460 D

Made of stainless steel.
 Entry on the right side.
 Two conveyor speeds:
 -1st. Speed: 170 baskets/h.
 -2nd. Speed: 255 baskets/h.
 Equipped with 1 GA-40 hot water generator (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 1st washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -No heating.
 Washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 12 kW.
 Double rinse module:
 -Pre-rinse module
 -Heating power: 5 kW.
 -Rinse pump 0.26 kW.
 Rinse water boiler (34.5 kW). Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Tray-filters removable for cleaning.
 Thermostatically adjusted: wash 60 °C, and rinse 90 °C.
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 450 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 250 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.
 Electric power: 55.9 kW.
 Dimensions: 2.650 x 780 x 1.580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	1.250	50	1.440		Prever Interruptor diferencial
DRAIN	1.750	425	130	38	
SOFT HOT WATER	1.230	630	240	3/4"	Prever llave de corte en la toma
DRAIN	850	425	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, FI-460 I

DIMENSIONS

		Article	Packed
Length	mm	2.650,00	2.750,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	434,00	628,00
Volumen	m3	3,27	5,02

ELECTRICITY

Electric power	KW	
230V -1+N		55,90
230V - III		3x70+T - 180 A
400V - III+N		4x35+T - 125 A

WATER

Water consumption (lit/h)	450,00
Pressure (Kg/cm2)	2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used


LEVEL SOUND

(dB) 72,00

CONVEYOR DISHWASHER, FI-460 I

Made of stainless steel.
 Entry on the left side.
 Two conveyor speeds:
 -1st. Speed: 170 baskets/h.
 -2nd. Speed: 255 baskets/h.
 Equipped with 1 GA-40 hot water generator (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 1st washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -No heating.
 Washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 12 kW.
 Double rinse module:
 -Pre-rinse module
 -Heating power: 5 kW.
 -Rinse pump 0.26 kW.
 Rinse water boiler (34.5 kW). Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Tray-filters removable for cleaning.
 Thermostatically adjusted: wash 60 °C, and rinse 90 °C.
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 450 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 250 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.
 Electric power: 55.9 kW.
 Dimensions: 2.650 x 780 x 1.580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	700	50	1.440		Prever Interruptor diferencial
SOFT HOT WATER	680	630	240	3/4"	Prever llave de corte en la toma
DRAIN	2.100	425	130	38	
DRAIN	1.200	425	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, FI-550 I

DIMENSIONS

		Article	Packed
Length	mm	3.250,00	3.350,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	556,00	792,00
Volumen	m3	4,01	6,11

ELECTRICITY

Electric power	KW	
230V -1+N		63,10
230V - III		3x95+T - 200 A
400V - III+N		4x50+T - 125 A

WATER

Water consumption (lit/h)	450,00
Pressure (Kg/cm2)	2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used


LEVEL SOUND

(dB) 72,00

CONVEYOR DISHWASHER, FI-550 I

Made of stainless steel.
Entry on the left side.
Two conveyor speeds:
-1st. Speed: 203 baskets/h.
-2nd. Speed: 305 baskets/h.
Splash-guard module at entry.
Dividing curtains highly resistant to chemical agents and heat.
Prewashing module:
-Tank 55 litres
-2 pumps x 0.6 kW.
-No heating.
2nd washing module:
-Tank 90 litres.
-Pump: 2.2 kW.
-Heating power: 6 kW.
Washing module:
-Tank 90 litres.
-Pump: 2.2 kW.
-Heating power: 12 kW.
Double rinse module:
-Pre-rinse module
-Heating power: 5 kW.
- Rinse pump 0.26 kW.
Rinse water boiler (34.5 kW). Safety thermostat.
Analogic thermometers for wash and rinse water temperature.
Tray-filters removable for cleaning.
Thermostatically adjusted: wash 60 °C, and rinse 90 °C.
Safety thermostat.
Analogic thermometers for wash and rinse water temperature.
Water consumption: 450 l/h.
Magnetic switches for wash, rinse and door opening.
Energy economiser system.
Motor-reducer: 250 W.
Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.
Electric power: 63.1 kW.
Dimensions: 3.250 x 780 x 1.580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	700	50	1.440		Prever Interruptor diferencial
DRAIN	2.825	465	130	38	
DRAIN	1.200	425	130	38	
SOFT HOT WATER	680	630	240	3/4"	Prever llave de corte en la toma
DRAIN	2.100	425	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, FI-550 D

DIMENSIONS

		Article	Packed
Length	mm	3.250,00	3.350,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	556,00	792,00
Volumen	m3	4,01	6,11

ELECTRICITY

Electric power	KW	
230V -1+N		63,10
230V - III		3x95+T - 200 A
400V - III+N		4x50+T - 125 A

WATER

Water consumption (lit/h)	450,00
Pressure (Kg/cm2)	2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used


LEVEL SOUND

(dB) 72,00

CONVEYOR DISHWASHER, FI-550 D

Made of stainless steel.
 Entry on the right side.
 Two conveyor speeds:
 -1st. Speed: 203 baskets/h.
 -2nd. Speed: 305 baskets/h.
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Prewashing module:
 -Tank 55 litres
 -2 pumps x 0.6 kW.
 -No heating.
 2nd washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 6 kW.
 Washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 12 kW.
 Double rinse module:
 -Pre-rinse module
 -Heating power: 5 kW.
 - Rinse pump 0.26 kW.
 Rinse water boiler (34.5 kW). Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Tray-filters removable for cleaning.
 Thermostatically adjusted: wash 60 °C, and rinse 90 °C.
 Safety thermostat.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 450 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 250 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.
 Electric power: 63.1 kW.
 Dimensions: 3.250 x 780 x 1.580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	1.850	50	1.440		Prever Interruptor diferencial
DRAIN	675	465	130	38	
DRAIN	1.450	425	130	38	
DRAIN	2.350	425	130	38	
SOFT HOT WATER	1.830	630	240	3/4"	Prever llave de corte en la toma





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, ECO-280 I

DIMENSIONS

		Article	Packed
Length	mm	1.750,00	1.850,00
Depth	mm	780,00	955,00
Height	mm	1.580,00	1.890,00
Weigth	Kg	259,00	382,00
Volumen	m3	2,16	3,34

ELECTRICITY

Electric power	KW	
230V -1+N		19,20
230V - III		3x16+T - 63 A
400V - III+N		4x6+T - 40 A

WATER

Water consumption (lit/h)	360,00
Pressure (Kg/cm2)	2 - 4

GAS

Power	KW	46,50
	Kcal/h	39.990,00
LPG	Consumption (kg/h)	3,30
	Pressure (g/cm2)	37,00
Natural Gas	Consumption (m3/h)	4,20
	Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE

99AQ244

CONVEYOR DISHWASHER, ECO-280 I

Made of stainless steel.
 Entry on the left side.
 Two conveyor speeds:
 -1st. Speed: 103 baskets/h.
 -2nd. Speed: 155 baskets/h.
 Equipped with 1 GA-40 hot water generator (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 12 kW.
 Double rinse module:
 -Pre-rinse module,
 -Heating power: 5 kW.
 -Rinse pump 0.26 kW.
 Tray-filters removable for cleaning.
 Thermostatically adjusted: wash 60 °C, and rinse 90 °C.
 Safety thermostat.
 Pump for rinse water.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 360 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 250 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.
 Electrical power: 19.2 kW.
 Gas power: 40000 kcal/h (46.5 kW)
 Dimensions: 1750 x 780 x 1580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	510	160	300		Prever Interruptor diferencial
DRAIN	1.200	425	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, ECO-280 D

DIMENSIONS

		Article	Packed
Length	mm	1.750,00	1.850,00
Depth	mm	780,00	955,00
Height	mm	1.580,00	1.890,00
Weigth	Kg	259,00	382,00
Volumen	m3	2,16	3,34

ELECTRICITY

Electric power		KW	19,20
230V -1+N			
230V - III		3x16+T - 63 A	
400V - III+N		4x6+T - 40 A	

WATER

Water consumption (lit/h)		360,00
Pressure (Kg/cm2)		2 - 4

GAS

Power		KW	46,50
		Kcal/h	39.990,00
LPG		Consumption (kg/h)	3,30
		Pressure (g/cm2)	37,00
Natural Gas		Consumption (m3/h)	4,20
		Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE

99AQ244

CONVEYOR DISHWASHER, ECO-280 D

Made of stainless steel.
 Entry on the right side.
 Two conveyor speeds:
 -1st. Speed: 103 baskets/h.
 -2nd. Speed: 155 baskets/h.
 Equipped with 1 GA-40 hot water generator (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 12 kW.
 Double rinse module:
 -Pre-rinse module,
 -Heating power: 5 kW.
 -Rinse pump 0.26 kW.
 Tray-filters removable for cleaning.
 Thermostatically adjusted: wash 60 °C, and rinse 90 °C.
 Safety thermostat.
 Pump for rinse water.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 360 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 250 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.
 Electrical power: 19.2 kW.
 Gas power: 40000 kcal/h (46.5 kW)
 Dimensions: 1750 x 780 x 1580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	1.240	160	300		Prever Interruptor diferencial
DRAIN	850	425	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, ECO-370 I

DIMENSIONS

		Article	Packed
Length	mm	2.350,00	2.440,00
Depth	mm	780,00	955,00
Height	mm	1.580,00	1.890,00
Weigth	Kg	381,00	556,00
Volumen	m3	2,90	4,40

ELECTRICITY

Electric power		KW	20,40
230V -1+N			
230V - III		3x25+T - 80 A	
400V - III+N		4x10+T - 50 A	

WATER

Water consumption (lit/h)		360,00
Pressure (Kg/cm2)		2 - 4

GAS

Power		KW	46,50
		Kcal/h	39.990,00
LPG		Consumption (kg/h)	3,30
		Pressure (g/cm2)	37,00
Natural Gas		Consumption (m3/h)	4,20
		Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE

99AQ244

CONVEYOR DISHWASHER, ECO-370 I

Made of stainless steel.
 Entry on the left side.
 Two conveyor speeds:
 1st. Speed: 137 baskets/h.
 2nd. Speed: 205 baskets/h.
 Equipped with 1 GA-40 hot water generator (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Prewashing module:
 -Tank 55 litres
 -2 pumps x 0.6 kW.
 -No heating.
 Washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 12 kW.
 Double rinse module:
 -Pre-rinse module
 -Heating power: 5 kW.
 -Rinse pump 0.26 kW.
 Tray-filters removable for cleaning.
 Thermostatically adjusted: wash 60 °C, and rinse 90 °C.
 Safety thermostat.
 Pump for rinse water.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 360 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 250 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.
 Electrical power: 20.4 kW.
 Gas power: 40000 kcal/h (46.5 kW)
 Dimensions: 2.350 x 780 x 1.580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	510	160	300		Prever Interruptor diferencial
DRAIN	1.925	465	130	38	
DRAIN	1.200	425	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, ECO-370 D

DIMENSIONS

		Article	Packed
Length	mm	2.350,00	2.440,00
Depth	mm	780,00	955,00
Height	mm	1.580,00	1.890,00
Weigth	Kg	381,00	556,00
Volumen	m3	2,90	4,40

ELECTRICITY

Electric power	KW	
230V -1+N		20,40
230V - III		3x25+T - 80 A
400V - III+N		4x10+T - 50 A

WATER

Water consumption (lit/h)		360,00
Pressure (Kg/cm2)		2 - 4

GAS

Power	KW	46,50
	Kcal/h	39.990,00
LPG	Consumption (kg/h)	3,30
	Pressure (g/cm2)	37,00
Natural Gas	Consumption (m3/h)	4,20
	Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE

99AQ244

CONVEYOR DISHWASHER, ECO-370 D

Made of stainless steel.
 Entry on the right side.
 Two conveyor speeds:
 1st. Speed: 137 baskets/h.
 2nd. Speed: 205 baskets/h.
 Equipped with 1 GA-40 hot water generator (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Prewashing module:
 -Tank 55 litres
 -2 pumps x 0.6 kW.
 -No heating.
 Washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 12 kW.
 Double rinse module:
 -Pre-rinse module
 -Heating power: 5 kW.
 -Rinse pump 0.26 kW.
 Tray-filters removable for cleaning.
 Thermostatically adjusted: wash 60 °C, and rinse 90 °C.
 Safety thermostat.
 Pump for rinse water.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 360 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 250 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.
 Electrical power: 20.4 kW.
 Gas power: 40000 kcal/h (46.5 kW)
 Dimensions: 2.350 x 780 x 1.580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	1.840	160	300		Prever Interruptor diferencial
DRAIN	1.450	425	130	38	
DRAIN	675	465	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, ECO-460 I

DIMENSIONS

		Article	Packed
Length	mm	2.650,00	2.750,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	434,00	628,00
Volumen	m3	3,27	5,02

ELECTRICITY

Electric power		KW	21,40
230V -1+N			
230V - III		3x25+T - 80 A	
400V - III+N		4x10+T - 50 A	

WATER

Water consumption (lit/h)		450,00
Pressure (Kg/cm2)		2 - 4

GAS

Power		KW	46,50
		Kcal/h	39.990,00
LPG		Consumption (kg/h)	3,30
		Pressure (g/cm2)	37,00
Natural Gas		Consumption (m3/h)	4,20
		Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE

99AQ244

CONVEYOR DISHWASHER, ECO-460 I

Made of stainless steel.
 Entry on the left side.
 Two conveyor speeds:
 -1st. Speed: 170 baskets/h.
 -2nd. Speed: 255 baskets/h.
 Equipped with 1 GA-40 hot water generator (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 1st washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -No heating.
 Washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 12 kW.
 Double rinse module:
 -Pre-rinse module
 -Heating power: 5 kW.
 -Rinse pump 0.26 kW.
 Tray-filters removable for cleaning.
 Thermostatically adjusted: wash 60 °C, and rinse 90 °C.
 Safety thermostat.
 Pump for rinse water.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 450 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 250 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.
 Electric power: 21.4 kW.
 Gas power: 40000 kcal/h (46.5 kW)
 Dimensions: 2.650 x 780 x 1.580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	510	160	300		Prever Interruptor diferencial
DRAIN	2.100	425	130	38	
DRAIN	1.200	425	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, ECO-460 D

DIMENSIONS

		Article	Packed
Length	mm	2.650,00	2.750,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	434,00	628,00
Volumen	m3	3,27	5,02

ELECTRICITY

Electric power	KW	
230V -1+N		21,40
230V - III		3x25+T - 80 A
400V - III+N		4x10+T - 50 A

WATER

Water consumption (lit/h)	450,00
Pressure (Kg/cm2)	2 - 4

GAS

Power	KW	46,50
	Kcal/h	39.990,00
LPG	Consumption (kg/h)	3,30
	Pressure (g/cm2)	37,00
Natural Gas	Consumption (m3/h)	4,20
	Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE

99AQ244

CONVEYOR DISHWASHER, ECO-460 D

Made of stainless steel.
 Entry on the right side.
 Two conveyor speeds:
 -1st. Speed: 170 baskets/h.
 -2nd. Speed: 255 baskets/h.
 Equipped with 1 GA-40 hot water generator (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 1st washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -No heating.
 Washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 12 kW.
 Double rinse module:
 -Pre-rinse module
 -Heating power: 5 kW.
 -Rinse pump 0.26 kW.
 Tray-filters removable for cleaning.
 Thermostatically adjusted: wash 60 °C, and rinse 90 °C.
 Safety thermostat.
 Pump for rinse water.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 450 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 250 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.
 Electric power: 21.4 kW.
 Gas power: 40000 kcal/h (46.5 kW)
 Dimensions: 2.650 x 780 x 1.580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	2.140	160	300		Prever Interruptor diferencial
DRAIN	1.750	425	130	38	
DRAIN	850	425	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, ECO-550 I

DIMENSIONS

		Article	Packed
Length	mm	3.250,00	3.350,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	556,00	792,00
Volumen	m3	4,01	6,11

ELECTRICITY

Electric power		KW	31,60
230V -1+N			
230V - III		3x25+T - 100 A	
400V - III+N		4x16+T - 63 A	

WATER

Water consumption (lit/h)		450,00
Pressure (Kg/cm2)		2 - 4

GAS

Power		KW	46,50
		Kcal/h	39.990,00
LPG		Consumption (kg/h)	3,30
		Pressure (g/cm2)	37,00
Natural Gas		Consumption (m3/h)	4,20
		Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE

99AQ244

CONVEYOR DISHWASHER, ECO-550 I

Made of stainless steel.
 Entry on the left side.
 Two conveyor speeds:
 -1st. Speed: 203 baskets/h.
 -2nd. Speed: 305 baskets/h.
 Equipped with 1 GA-40 hot water generator (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Prewashing module:
 -Tank 55 litres
 -2 pumps x 0.6 kW.
 -No heating.
 2nd washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 6 kW.
 Washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 12 kW.
 Double rinse module:
 -Pre-rinse module
 -Heating power: 5 kW.
 - Rinse pump 0.26 kW.
 Tray-filters removable for cleaning.
 Thermostatically adjusted: wash 60 °C, and rinse 90 °C.
 Safety thermostat. Pump for rinse water.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 450 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 250 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.
 Electric power: 31.6 kW.
 Gas power: 40000 kcal/h (46.5 kW)
 Dimensions: 3.250 x 780 x 1.580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	510	160	300		Prever Interruptor diferencial
DRAIN	2.825	465	130	38	
DRAIN	2.100	425	130	38	
DRAIN	1.200	425	130	38	





Dishwashing

Conveyor dishwashers

CONVEYOR DISHWASHER, ECO-550 D

DIMENSIONS

		Article	Packed
Length	mm	3.250,00	3.350,00
Depth	mm	780,00	960,00
Height	mm	1.580,00	1.900,00
Weigth	Kg	556,00	792,00
Volumen	m3	4,01	6,11

ELECTRICITY

Electric power	KW	
230V -1+N		31,60
230V - III		3x25+T - 100 A
400V - III+N		4x16+T - 63 A

WATER

Water consumption (lit/h)	450,00
Pressure (Kg/cm2)	2 - 4

GAS

Power	KW	46,50
	Kcal/h	39.990,00
LPG	Consumption (kg/h)	3,30
	Pressure (g/cm2)	37,00
Natural Gas	Consumption (m3/h)	4,20
	Pressure (g/cm2)	18,00

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 72,00


Certificate EQNET- CE


99AQ244

CONVEYOR DISHWASHER, ECO-550 D

Made of stainless steel.
 Entry on the right side.
 Two conveyor speeds:
 -1st. Speed: 203 baskets/h.
 -2nd. Speed: 305 baskets/h.
 Equipped with 1 GA-40 hot water generator (gas operating).
 Splash-guard module at entry.
 Dividing curtains highly resistant to chemical agents and heat.
 Prewashing module:
 -Tank 55 litres
 -2 pumps x 0.6 kW.
 -No heating.
 2nd washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 6 kW.
 Washing module:
 -Tank 90 litres.
 -Pump: 2.2 kW.
 -Heating power: 12 kW.
 Double rinse module:
 -Pre-rinse module
 -Heating power: 5 kW.
 - Rinse pump 0.26 kW.
 Tray-filters removable for cleaning.
 Thermostatically adjusted: wash 60 °C, and rinse 90 °C.
 Safety thermostat. Pump for rinse water.
 Analogic thermometers for wash and rinse water temperature.
 Water consumption: 450 l/h.
 Magnetic switches for wash, rinse and door opening.
 Energy economiser system.
 Motor-reducer: 250 W.
 Baskets equipment: 2 x CT-10, 2 x CP-16/18, 1 x CV-16/105, and 16 cutlery containers.
 Electric power: 31.6 kW.
 Gas power: 40000 kcal/h (46.5 kW)
 Dimensions: 3.250 x 780 x 1.580 mm.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	2.740	160	300		Prever Interruptor diferencial
DRAIN	2.575	465	130	38	
DRAIN	1.800	425	130	38	
DRAIN	2.350	425	130	38	





Dishwashing

Conveyor dishwashers

SUPPLEMENT FOR AIR EXHAUST

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	650,00	350,00
Depth	mm	250,00	955,00
Height	mm	645,00	2.000,00
Weigth	Kg	20,00	25,00
Volumen	m3	0,10	0,67

ELECTRICITY

Not used			0,00
----------	--	--	-------------

WATER

Not used

GAS

Not used

STEAM

Not used

AIR

Not used


SUPPLEMENT FOR AIR EXHAUST


Made of stainless steel.

Connection for external air exhaust.

Ø 200 mm.

Connections points	X	Y	Z	Diameter	Information
---------------------------	----------	----------	----------	-----------------	--------------------



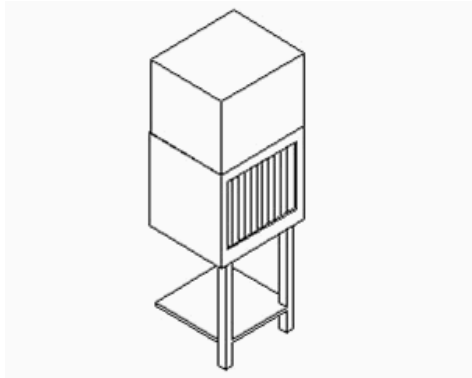

Dishwashing

Conveyor dishwashers

STEAM CONDENSER, CV

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	600,00	630,00
Depth	mm	700,00	700,00
Height	mm	2.000,00	2.000,00
Weigth	Kg	70,00	105,00
Volumen	m3	0,84	0,88

ELECTRICITY

<u>Electric power</u>			
230V - 1+N		KW	0,95
230V - III			
400V - III+N			+ 0,5 KW

WATER

Water consumption (lit/h)			180,00
Pressure (Kg/cm2)			2 - 4

GAS

Not used

STEAM

Not used

AIR

Not used

STEAM CONDENSER, CV

Made of stainless steel.

Turbine extractor body. Ventilator fan and chilled-water coil.


This module may be fitted to all basic models.

Power: 0.95 kW.

Dimensions: 600 x 700 x 2000 mm.

Connections points

	X	Y	Z	Diameter	Information
ELECTRICITY	0	0	0		Se conecta al lavavajillas





Dishwashing

Conveyor dishwashers

DRYING TUNNEL, TS

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	600,00	630,00
Depth	mm	700,00	700,00
Height	mm	2.000,00	2.000,00
Weigth	Kg	70,00	105,00
Volumen	m3	0,84	0,88

ELECTRICITY

<u>Electric power</u>		KW	10,30
230V - 1+N			
230V - III			
400V - III+N			+ 9 KW

WATER

Not used

GAS

Not used

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) **72**

DRYING TUNNEL, TS

Made of stainless steel.


Heating elements box and ventilator for drying dishes.

This module may be fitted to all basic models.

Power: 10,3 kW.

Dimensions: 600 x 700 x 2000 mm.

<u>Connections points</u>	<u>X</u>	<u>Y</u>	<u>Z</u>	<u>Diameter</u>	<u>Information</u>
ELECTRICITY	0	0	0		Se conecta al lavavajillas





Dishwashing

Conveyor dishwashers

EXTRA DRYING TUNNEL, TSE

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	800,00	630,00
Depth	mm	700,00	700,00
Height	mm	2.000,00	2.000,00
Weigth	Kg	70,00	105,00
Volumen	m3	1,12	0,88

ELECTRICITY

<u>Electric power</u>		KW	14,80
230V - 1+N			
230V - III			
400V - III+N			+ 9 KW

WATER

Not used

GAS

Not used

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) **72**

EXTRA DRYING TUNNEL, TSE

Made of stainless steel.

Heating elements box and ventilator for drying dishes.


This module may be fitted to all basic models.


Power: 14.8 kW.

Dimensions: 800 x 700 x 2000 mm.

Connections points

	X	Y	Z	Diameter	Information
ELECTRICITY	0	0	0		Se conecta al lavavajillas



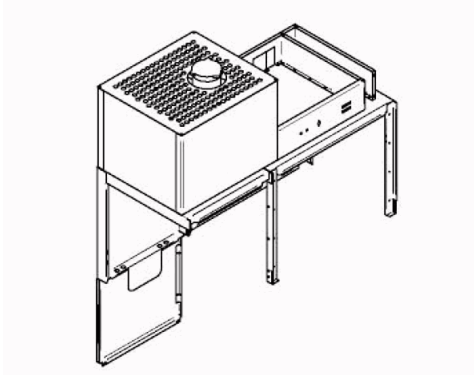

Dishwashing

Conveyor dishwashers

ENERGY RECUPERATOR

DIMENSIONS

		<u>Article</u>	<u>Packed</u>
Length	mm	0,00	0,00
Depth	mm	0,00	0,00
Height	mm	0,00	0,00
Weigth	Kg	70,00	105,00
Volumen	m3	0,00	0,57

ELECTRICITY

<u>Electric power</u>	KW	
230V - 1+N		0,75
230V - III		
400V - III+N	+ 0,75 kW	

WATER

Not used

GAS

Not used

STEAM

Not used

AIR

Not used

LEVEL SOUND

(dB) 0,00

ENERGY RECUPERATOR

FOR MODULAR CONVEYOR DISHWASHERS, 460 and 550 models.

This deals basically with the use of heat energy given off during rinsing for heating the mains water which enters the pressure pot or filling the pre-wash tub.

This is achieved by placing a module over the rinsing tunnel on which a coil is placed, through which the mains water flows before entering the pressure pot.

An increase of between 15 and 20° is obtained, reaching a temperature of 30°.

A water temperature control is provided which, if 30°C are not exceeded, sends the water to the pressure pot if the latter requires this and not to the pre-wash tub.

Placed on the top of the machine, total length not increases.

ONLY FACTORY FITTED - This system cannot be fitted to a dishwasher sold on the market.

Connections points	X	Y	Z	Diameter	Information
ELECTRICITY	0	0	0		Se conecta al control del lavavajillas

